


PROTECTIVE COVERS/CAPS



AVAILABLE FOR BOTH PLUG AND RECEPTACLE CONNECTORS, PROTECTIVE COVERS PROTECT THE MATING SURFACES OF THE CONNECTOR FROM PHYSICAL DAMAGE AND SEAL THE CONNECTOR AGAINST PARTICLE AND MOISTURE CONTAMINATION. PROTECTIVE COVERS CONSIST BASICALLY OF A CYLINDRICAL BODY CLOSED AT ONE END.

SERIES	DESCRIPTION	PAGE
32 & 33	PROTECTIVE COVERS FOR MIL-DTL-38999 SERIES III	86
42 & 43	PROTECTIVE COVERS FOR MIL-DTL-5015	88
80 & 81	PROTECTIVE COVERS FOR MIL-DTL-26482	90
123 & 124	PROTECTIVE COVERS FOR VG95234	92
451 & 452	PROTECTIVE COVERS FOR MIL-DTL-38999 SERIES IV	94
501 & 502	PROTECTIVE COVERS FOR MIL-DTL-38999 SERIES I	96
510 & 511	PROTECTIVE COVERS FOR MIL-DTL-38999 SERIES II	98
591 & 601	PROTECTIVE COVERS FOR MIL-DTL-83723 SERIES III (THREADED)	100
592 & 602	PROTECTIVE COVERS FOR MIL-DTL-83723 SERIES III (BAYONET)	102
M11 & M12	PROTECTIVE COVERS FOR METRIC THREADS	104
S21 & S22	PROTECTIVE COVERS FOR STANDARD THREADS	106
JUP	PROTECTIVE COVERS FOR SORIEAU® JUPITER® CONNECTORS	108

TF32 - FOR PLUGS

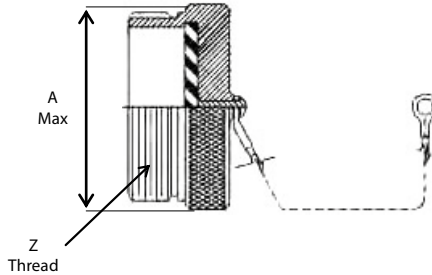

TF33 - FOR RECEPTACLES

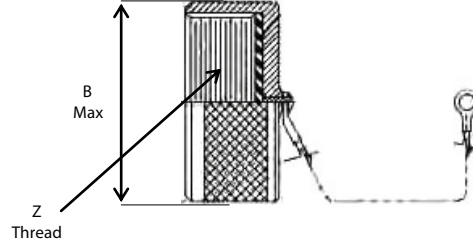


TABLE I—PROTECTIVE COVER DIMENSIONS

SHELL SIZE	Z THREAD	A MAX	B MAX
09 (A)	.6250-0.1P-0.3L-TS	.906 (23.0)	.906 (23.0)
11 (B)	.7500-0.1P-0.3L-TS	1.024 (26.0)	1.102 (28.0)
13 (C)	.8750-0.1P-0.3L-TS	1.220 (31.0)	1.220 (31.0)
15 (D)	1.0000-0.1P-0.3L-TS	1.300 (33.0)	1.260 (32.0)
17 (E)	1.1875-0.1P-0.3L-TS	1.457 (37.0)	1.457 (37.0)
19 (F)	1.2500-0.1P-0.3L-TS	1.575 (40.0)	1.535 (39.0)
21 (G)	1.3750-0.1P-0.3L-TS	1.732 (44.0)	1.654 (42.0)
23 (H)	1.5000-0.1P-0.3L-TS	1.811 (46.0)	1.772 (45.0)
25 (J)	1.6250-0.1P-0.3L-TS	1.969 (50.0)	1.929 (49.0)


PROTECTIVE COVERS - PART NUMBER BREAKDOWN / HOW TO ORDER

TF	32-	09	W-	55	S-	02	
							EYELET OR RING SIZE (SEE TABLE III OR IV)
							ACCESSORY (SEE TABLE II)
							LANYARD LENGTH 1 1/2 INCH INCREMENTS (EX. 35 IS 3.5 INCHES) (OMIT FOR STANDARD)
							MATERIAL & FINISH W - ALUMINUM W/ O.D. CADMIUM F - ALUMINUM W/ ELECTROLESS NICKEL G - ALUMINUM HARD ANODIZED K - STAINLESS STEEL PASSIVATED A - ALUMINUM BLACK ANODIZED (SEE SECTION B FOR ADDITIONAL MATERIAL/FINISHES)
							SHELL SIZE
							INTERFACE 32 - MIL-DTL-38999 SERIES III (FOR PLUGS) 33 - MIL-DTL-38999 SERIES III (FOR RECEPTACLES)
							BASIC PART NUMBER


LANYARDS




#8 STAINLESS STEEL SASH CHAIN



STAINLESS STEEL WIRE ROPE WITH CHOICE OF JACKET MATERIAL




NYLON ROPE, BLACK




STAINLESS STEEL BEAD CHAIN

TABLE II - LANYARD OPTIONS	
ORDERING CODE	DESCRIPTION
X	NO ACCESSORY
R	STAINLESS STEEL WIRE ROPE, PVC JACKET
B	STAINLESS STEEL BEAD CHAIN
S	STAINLESS STEEL SASH CHAIN
G	NYLON ROPE, BLACK
Y	STAINLESS STEEL WIRE ROPE, NYLON JACKET
T	STAINLESS STEEL WIRE ROPE, TEFLON JACKET

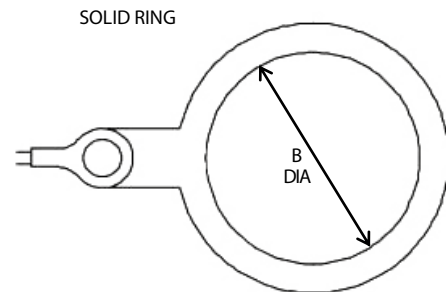

SOLID RING



EYELET

A
DIA

TABLE III EYELET SPECIFICATIONS	
DASH NUMBER	A DIA
00	NO EYELET
01	0.140 (3.6)
02	0.167 (4.2)
03	0.197 (5.0)
04	0.125 (3.2)
05	0.156 (4.0)
06	0.182 (4.6)
07	0.191 (4.9)
08	0.218 (5.5)

TABLE IV SOLID RING SPECIFICATIONS	
DASH NUMBER	B DIA
20	.512 (13.0)
21	.583 (14.8)
22	.709 (18.0)
23	.787 (20.0)
24	.906 (23.0)
25	1.024 (26.0)
26	1.178 (30.0)
27	1.266 (32.2)
28	1.428 (36.3)
29	1.535 (39.0)
30	1.678 (42.6)
31	1.760 (44.7)
32	1.890 (48.0)
33	2.140 (54.4)
34	2.406 (61.1)
35	2.656 (67.5)

DISCLAIMER

ALL INFORMATION IN THIS CATALOG IS BELIEVED TO BE RELIABLE. READERS SHOULD INDEPENDENTLY EVALUATE EACH PRODUCT TO CONFIRM SUITABILITY WITH HIS/HER SPECIFIC APPLICATION. TOPFLITE COMPONENTS MAKES NO WARRANTIES AS TO THE ACCURACY OR COMPLETENESS OF THE INFORMATION AND DISCLAIM ANY LIABILITY REGARDING ITS USE. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. TOPFLITE COMPONENTS PROCESSES OR MATERIALS THAT DO NOT AFFECT COMPLIANCE WITH ANY APPLICABLE SPECIFICATION ARE SUBJECT TO CHANGE WITHOUT NOTICE.

TF42 - FOR PLUGS

TF43 - FOR RECEPTACLES

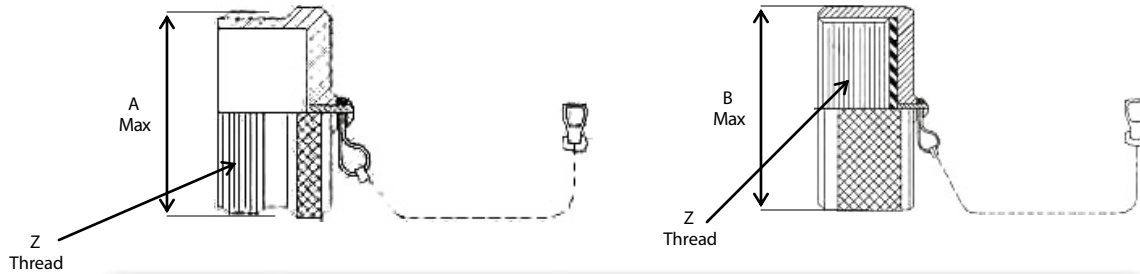


TABLE I—PROTECTIVE COVER DIMENSIONS

SHELL SIZE	Z THREAD	A MAX	B MAX
08	1/2 - 28 UNEF	.562 (14.3)	.688 (17.5)
10	5/8 - 24 UNEF	.687 (17.4)	.815 (20.7)
12	3/4 - 20 UNEF	.812 (20.6)	1.000 (25.4)
14	7/8 - 20 UNEF	.937 (23.8)	1.125 (28.6)
16	1 - 20 UNEF	1.062 (27.0)	1.188 (30.2)
18	1 1/8 - 18 UNEF	1.187 (30.1)	1.344 (34.1)
20	1 1/4 - 18 UNEF	1.312 (33.3)	1.469 (37.3)
22	1 3/8 - 18 UNEF	1.437 (36.5)	1.594 (40.5)
24	1 1/2 - 18 UNEF	1.562 (39.7)	1.719 (43.7)
28	1 3/4 - 18 UNS	1.812 (46.0)	1.969 (50.0)
32	2 - 18 UNS	2.062 (52.4)	2.219 (56.4)
36	2 1/4 - 16 UN	2.312 (58.7)	2.469 (62.7)
40	2 1/2 - 16 UN	2.562 (65.1)	2.719 (69.1)
44	2 3/4 - 16 UN	2.812 (71.4)	2.969 (75.4)
48	3 - 16 UN	3.062 (77.8)	3.188 (81.0)


PROTECTIVE COVERS - PART NUMBER BREAKDOWN / HOW TO ORDER

TF	42-	10	W-	55	S-	02	
							EYELET OR RING SIZE (SEE TABLE III OR IV)
							ACCESSORY (SEE TABLE II)
							LENGTH 1/2 INCH INCREMENTS (EX. 35 IS 3.5 INCHES) (OMIT FOR STANDARD)
							MATERIAL & FINISH W - ALUMINUM W/ O.D. CADMIUM F - ALUMINUM W/ ELECTROLESS NICKEL G - ALUMINUM HARD ANODIZED K - STAINLESS STEEL PASSIVATED A - ALUMINUM BLACK ANODIZED (SEE SECTION B FOR ADDITIONAL MATERIAL/FINISHES)
							SHELL SIZE
							INTERFACE 42 - MIL-DTL-5015 (FOR PLUGS) 43 - MIL-DTL-5015 (FOR RECEPTACLES)
							BASIC PART NUMBER


LANYARDS




#8 STAINLESS STEEL SASH CHAIN



STAINLESS STEEL WIRE ROPE WITH CHOICE OF JACKET MATERIAL




NYLON ROPE, BLACK




STAINLESS STEEL BEAD CHAIN

TABLE II - LANYARD OPTIONS	
ORDERING CODE	DESCRIPTION
X	NO ACCESSORY
R	STAINLESS STEEL WIRE ROPE, PVC JACKET
B	STAINLESS STEEL BEAD CHAIN
S	STAINLESS STEEL SASH CHAIN
G	NYLON ROPE, BLACK
Y	STAINLESS STEEL WIRE ROPE, NYLON JACKET
T	STAINLESS STEEL WIRE ROPE, TEFLON JACKET

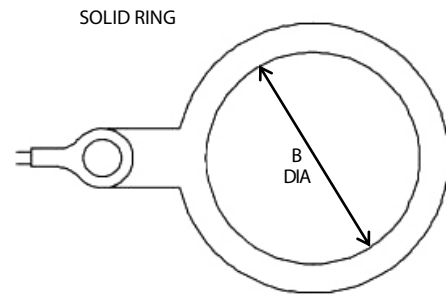

SOLID RING



EYELET

A
DIA


TABLE III EYELET SPECIFICATIONS	
DASH NUMBER	A DIA
00	NO EYELET
01	0.140 (3.6)
02	0.167 (4.2)
03	0.197 (5.0)
04	0.125 (3.2)
05	0.156 (4.0)
06	0.182 (4.6)
07	0.191 (4.9)
08	0.218 (5.5)

TABLE IV SOLID RING SPECIFICATIONS	
DASH NUMBER	B DIA
20	.512 (13.0)
21	.583 (14.8)
22	.709 (18.0)
23	.787 (20.0)
24	.906 (23.0)
25	1.024 (26.0)
26	1.178 (30.0)
27	1.266 (32.2)
28	1.428 (36.3)
29	1.535 (39.0)
30	1.678 (42.6)
31	1.760 (44.7)
32	1.890 (48.0)
33	2.140 (54.4)
34	2.406 (61.1)
35	2.656 (67.5)

DISCLAIMER

ALL INFORMATION IN THIS CATALOG IS BELIEVED TO BE RELIABLE. READERS SHOULD INDEPENDENTLY EVALUATE EACH PRODUCT TO CONFIRM SUITABILITY WITH HIS/HER SPECIFIC APPLICATION. TOPFLITE COMPONENTS MAKES NO WARRANTIES AS TO THE ACCURACY OR COMPLETENESS OF THE INFORMATION AND DISCLAIM ANY LIABILITY REGARDING ITS USE. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. TOPFLITE COMPONENTS PROCESSES OR MATERIALS THAT DO NOT AFFECT COMPLIANCE WITH ANY APPLICABLE SPECIFICATION ARE SUBJECT TO CHANGE WITHOUT NOTICE.

TF80 - FOR PLUGS

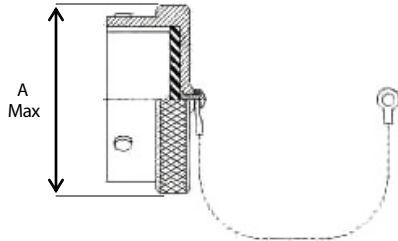

TF81 - FOR RECEPTACLES

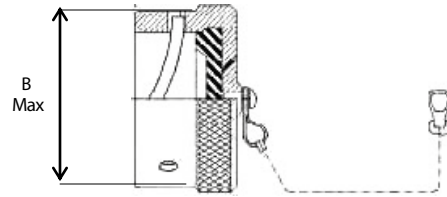


TABLE I—PROTECTIVE COVER DIMENSIONS

SHELL SIZE	A MAX	B MAX
08	.719 (18.3)	.734 (18.6)
10	.844 (21.4)	.859 (21.8)
12	1.000 (25.4)	1.000 (25.4)
14	1.125 (28.6)	1.125 (28.6)
16	1.250 (31.8)	1.250 (31.8)
18	1.375 (34.9)	1.375 (34.9)
20	1.500 (38.1)	1.500 (38.1)
22	1.625 (41.3)	1.625 (41.3)
24	1.750 (44.5)	1.750 (44.5)


PROTECTIVE COVERS - PART NUMBER BREAKDOWN / HOW TO ORDER

TF	80-	10	W-	55	S-	02	
							EYELET OR RING SIZE (SEE TABLE III OR IV)
							ACCESSORY (SEE TABLE II)
							LENGTH 1/2 INCH INCREMENTS (EX. 35 IS 3.5 INCHES) (OMIT FOR STANDARD)
							MATERIAL & FINISH W - ALUMINUM W/ O.D. CADMIUM F - ALUMINUM W/ ELECTROLESS NICKEL G - ALUMINUM HARD ANODIZED K - STAINLESS STEEL PASSIVATED A - ALUMINUM BLACK ANODIZED (SEE SECTION B FOR ADDITIONAL MATERIAL/FINISHES)
							SHELL SIZE
							INTERFACE 80 - MIL-DTL-26482 (FOR PLUGS) 81 - MIL-DTL-26482 (FOR RECEPTACLES)
							BASIC PART NUMBER


LANYARDS




#8 STAINLESS STEEL SASH CHAIN



STAINLESS STEEL WIRE ROPE WITH CHOICE OF JACKET MATERIAL




NYLON ROPE, BLACK




STAINLESS STEEL BEAD CHAIN

TABLE II - LANYARD OPTIONS	
ORDERING CODE	DESCRIPTION
X	NO ACCESSORY
R	STAINLESS STEEL WIRE ROPE, PVC JACKET
B	STAINLESS STEEL BEAD CHAIN
S	STAINLESS STEEL SASH CHAIN
G	NYLON ROPE, BLACK
Y	STAINLESS STEEL WIRE ROPE, NYLON JACKET
T	STAINLESS STEEL WIRE ROPE, TEFLON JACKET

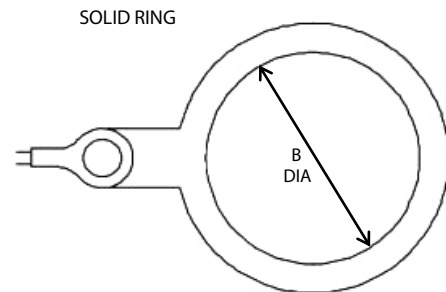

SOLID RING



EYELET

A
DIA


TABLE III EYELET SPECIFICATIONS	
DASH NUMBER	A DIA
00	NO EYELET
01	0.140 (3.6)
02	0.167 (4.2)
03	0.197 (5.0)
04	0.125 (3.2)
05	0.156 (4.0)
06	0.182 (4.6)
07	0.191 (4.9)
08	0.218 (5.5)

TABLE IV SOLID RING SPECIFICATIONS	
DASH NUMBER	B DIA
20	.512 (13.0)
21	.583 (14.8)
22	.709 (18.0)
23	.787 (20.0)
24	.906 (23.0)
25	1.024 (26.0)
26	1.178 (30.0)
27	1.266 (32.2)
28	1.428 (36.3)
29	1.535 (39.0)
30	1.678 (42.6)
31	1.760 (44.7)
32	1.890 (48.0)
33	2.140 (54.4)
34	2.406 (61.1)
35	2.656 (67.5)

DISCLAIMER

ALL INFORMATION IN THIS CATALOG IS BELIEVED TO BE RELIABLE. READERS SHOULD INDEPENDENTLY EVALUATE EACH PRODUCT TO CONFIRM SUITABILITY WITH HIS/HER SPECIFIC APPLICATION. TOPFLITE COMPONENTS MAKES NO WARRANTIES AS TO THE ACCURACY OR COMPLETENESS OF THE INFORMATION AND DISCLAIM ANY LIABILITY REGARDING ITS USE. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. TOPFLITE COMPONENTS PROCESSES OR MATERIALS THAT DO NOT AFFECT COMPLIANCE WITH ANY APPLICABLE SPECIFICATION ARE SUBJECT TO CHANGE WITHOUT NOTICE.

TF123 - FOR PLUGS

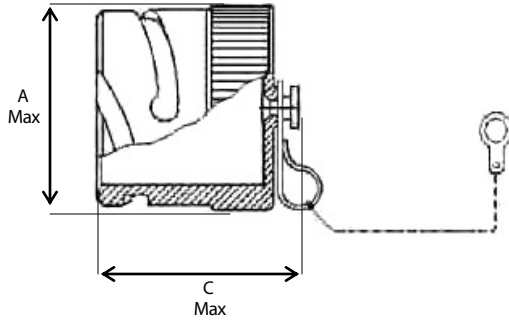

TF124 - FOR RECEPTACLES

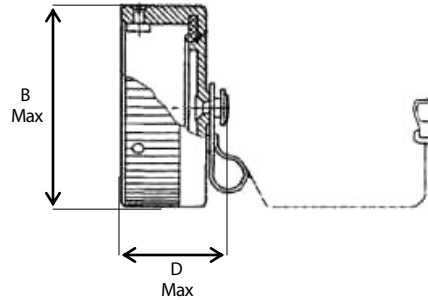


TABLE I—PROTECTIVE COVER DIMENSIONS

SHELL SIZE	A MAX	B MAX	C MAX	D MAX
10SL	0.827 (21.00)	0.925 (23.50)	1.142 (29.00)	0.787 (20.00)
12S	0.945 (24.00)	1.063 (27.00)	1.142 (29.00)	0.787 (20.00)
14S	1.083 (27.50)	1.201 (30.50)	1.142 (29.00)	0.787 (20.00)
16S	1.181 (30.00)	1.299 (33.00)	1.142 (29.00)	0.787 (20.00)
16	1.181 (30.00)	1.299 (33.00)	1.457 (37.00)	0.984 (25.00)
18	1.319 (33.50)	1.476 (37.50)	1.457 (37.00)	0.984 (25.00)
20	1.457 (37.00)	1.614 (41.00)	1.457 (37.00)	0.984 (25.00)
22	1.575 (40.00)	1.732 (44.00)	1.457 (37.00)	0.984 (25.00)
24	1.713 (43.50)	1.870 (47.50)	1.457 (37.00)	0.984 (25.00)
28	1.949 (49.50)	2.146 (54.50)	1.457 (37.00)	0.984 (25.00)
32	2.205 (56.00)	2.402 (61.00)	1.457 (37.00)	0.984 (25.00)
36	2.461 (62.50)	2.657 (67.50)	1.457 (37.00)	0.984 (25.00)


PROTECTIVE COVERS - PART NUMBER BREAKDOWN / HOW TO ORDER

TF	123-	10SL	W-	55	S-	02	
							EYELET OR RING SIZE (SEE TABLE III OR IV)
							ACCESSORY (SEE TABLE II)
							LENGTH 1/2 INCH INCREMENTS (EX. 35 IS 3.5 INCHES) (OMIT FOR STANDARD)
							MATERIAL & FINISH W - ALUMINUM W/ O.D. CADMIUM F - ALUMINUM W/ ELECTROLESS NICKEL G - ALUMINUM HARD ANODIZED K - STAINLESS STEEL PASSIVATED A - ALUMINUM BLACK ANODIZED (SEE SECTION B FOR ADDITIONAL MATERIAL/FINISHES)
							SHELL SIZE
							INTERFACE 123 - VG95234 (FOR PLUGS) 124 - VG95234 (FOR RECEPTACLES)
							BASIC PART NUMBER


LANYARDS




#8 STAINLESS STEEL SASH CHAIN



STAINLESS STEEL WIRE ROPE WITH CHOICE OF JACKET MATERIAL




NYLON ROPE, BLACK




STAINLESS STEEL BEAD CHAIN

TABLE II - LANYARD OPTIONS	
ORDERING CODE	DESCRIPTION
X	NO ACCESSORY
R	STAINLESS STEEL WIRE ROPE, PVC JACKET
B	STAINLESS STEEL BEAD CHAIN
S	STAINLESS STEEL SASH CHAIN
G	NYLON ROPE, BLACK
Y	STAINLESS STEEL WIRE ROPE, NYLON JACKET
T	STAINLESS STEEL WIRE ROPE, TEFLON JACKET

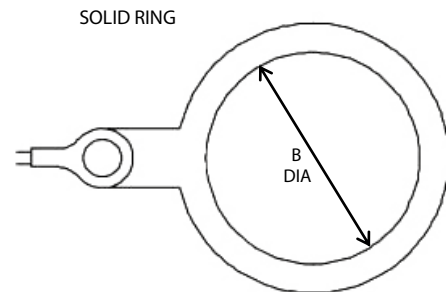

SOLID RING



EYELET

A
DIA

TABLE III EYELET SPECIFICATIONS	
DASH NUMBER	A DIA
00	NO EYELET
01	0.140 (3.6)
02	0.167 (4.2)
03	0.197 (5.0)
04	0.125 (3.2)
05	0.156 (4.0)
06	0.182 (4.6)
07	0.191 (4.9)
08	0.218 (5.5)

TABLE IV SOLID RING SPECIFICATIONS	
DASH NUMBER	B DIA
20	.512 (13.0)
21	.583 (14.8)
22	.709 (18.0)
23	.787 (20.0)
24	.906 (23.0)
25	1.024 (26.0)
26	1.178 (30.0)
27	1.266 (32.2)
28	1.428 (36.3)
29	1.535 (39.0)
30	1.678 (42.6)
31	1.760 (44.7)
32	1.890 (48.0)
33	2.140 (54.4)
34	2.406 (61.1)
35	2.656 (67.5)

DISCLAIMER

ALL INFORMATION IN THIS CATALOG IS BELIEVED TO BE RELIABLE. READERS SHOULD INDEPENDENTLY EVALUATE EACH PRODUCT TO CONFIRM SUITABILITY WITH HIS/HER SPECIFIC APPLICATION. TOPFLITE COMPONENTS MAKES NO WARRANTIES AS TO THE ACCURACY OR COMPLETENESS OF THE INFORMATION AND DISCLAIM ANY LIABILITY REGARDING ITS USE. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. TOPFLITE COMPONENTS PROCESSES OR MATERIALS THAT DO NOT AFFECT COMPLIANCE WITH ANY APPLICABLE SPECIFICATION ARE SUBJECT TO CHANGE WITHOUT NOTICE.

SERIES
451
452

TOPFLITE PROTECTIVE COVER
TF451 & TF452
MIL-DTL-38999 SERIES IV



TF451 - FOR PLUGS

TF452 - FOR RECEPTACLES





TABLE I—PROTECTIVE COVER DIMENSIONS

SHELL SIZE	A	B	C
11 (B)	.509 (12.9)	1.180 (30.0)	.875 (22.2)
13 (C)	.634 (16.1)	1.320 (33.5)	1.000 (25.4)
15 (D)	.759 (19.3)	1.440 (36.6)	1.125 (28.6)
17 (E)	.885 (22.5)	1.560 (39.6)	1.250 (31.8)
19 (F)	1.009 (25.6)	1.680 (42.7)	1.375 (34.9)
21 (G)	1.134 (28.8)	1.820 (46.2)	1.500 (38.1)
23 (H)	1.259 (32.0)	1.940 (49.3)	1.625 (41.3)
25 (J)	1.384 (35.2)	2.060 (52.3)	1.750 (44.5)


PROTECTIVE COVERS - PART NUMBER BREAKDOWN / HOW TO ORDER

TF	451-	11	W-	55	S-	02	
							EYELET OR RING SIZE (SEE TABLE III OR IV)
							ACCESSORY (SEE TABLE II)
							LENGTH 1/2 INCH INCREMENTS (EX. 35 IS 3.5 INCHES) (OMIT FOR STANDARD)
							MATERIAL & FINISH W - ALUMINU W/ O.D. CADMIUM F - ALUMINUM W/ ELECTROLESS NICKEL G - ALUMINUM HARD ANODIZED K - STAINLESS STEEL PASSIVATED A - ALUMINUM BLACK ANODIZED (SEE SECTION B FOR ADDITIONAL MATERIAL/FINISHES)
							SHELL SIZE
							INTERFACE 451 - MIL-DTL-38999 SERIES IV (FOR PLUGS) 452 - MIL-DTL-38999 SERIES IV (FOR RECEPTACLES)
							BASIC PART NUMBER


LANYARDS




#8 STAINLESS STEEL SASH CHAIN



STAINLESS STEEL WIRE ROPE WITH CHOICE OF JACKET MATERIAL



NYLON ROPE, BLACK



STAINLESS STEEL BEAD CHAIN

TABLE II - LANYARD OPTIONS	
ORDERING CODE	DESCRIPTION
X	NO ACCESSORY
R	STAINLESS STEEL WIRE ROPE, PVC JACKET
B	STAINLESS STEEL BEAD CHAIN
S	STAINLESS STEEL SASH CHAIN
G	NYLON ROPE, BLACK
Y	STAINLESS STEEL WIRE ROPE, NYLON JACKET
T	STAINLESS STEEL WIRE ROPE, TEFLON JACKET


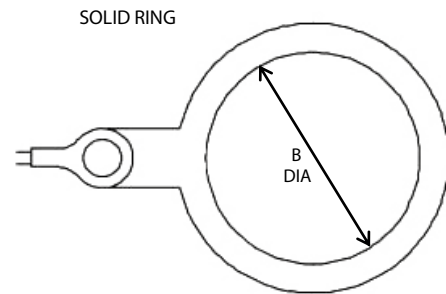



TABLE III EYELET SPECIFICATIONS	
DASH NUMBER	A DIA
00	NO EYELET
01	0.140 (3.6)
02	0.167 (4.2)
03	0.197 (5.0)
04	0.125 (3.2)
05	0.156 (4.0)
06	0.182 (4.6)
07	0.191 (4.9)
08	0.218 (5.5)

TABLE IV SOLID RING SPECIFICATIONS	
DASH NUMBER	B DIA
20	.512 (13.0)
21	.583 (14.8)
22	.709 (18.0)
23	.787 (20.0)
24	.906 (23.0)
25	1.024 (26.0)
26	1.178 (30.0)
27	1.266 (32.2)
28	1.428 (36.3)
29	1.535 (39.0)
30	1.678 (42.6)
31	1.760 (44.7)
32	1.890 (48.0)
33	2.140 (54.4)
34	2.406 (61.1)
35	2.656 (67.5)

DISCLAIMER

ALL INFORMATION IN THIS CATALOG IS BELIEVED TO BE RELIABLE. READERS SHOULD INDEPENDENTLY EVALUATE EACH PRODUCT TO CONFIRM SUITABILITY WITH HIS/HER SPECIFIC APPLICATION. TOPFLITE COMPONENTS MAKES NO WARRANTIES AS TO THE ACCURACY OR COMPLETENESS OF THE INFORMATION AND DISCLAIM ANY LIABILITY REGARDING ITS USE. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. TOPFLITE COMPONENTS PROCESSES OR MATERIALS THAT DO NOT AFFECT COMPLIANCE WITH ANY APPLICABLE SPECIFICATION ARE SUBJECT TO CHANGE WITHOUT NOTICE.

TF501 - FOR PLUGS

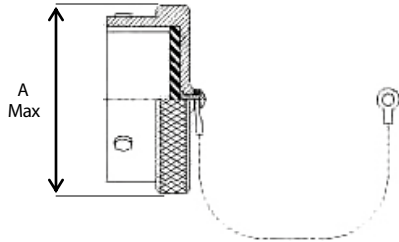

TF502 - FOR RECEPTACLES

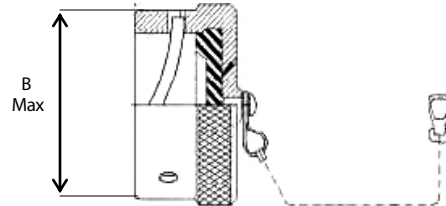


TABLE I—PROTECTIVE COVER DIMENSIONS

SHELL SIZE	A MAX	B MAX
9	.820 (20.8)	.844 (21.4)
11	.940 (23.9)	.968 (24.6)
13	1.070 (27.2)	1.125 (28.6)
15	1.190 (30.2)	1.250 (31.8)
17	1.320 (33.5)	1.406 (35.7)
19	1.440 (36.6)	1.500 (38.1)
21	1.570 (39.9)	1.625 (41.3)
23	1.690 (42.9)	1.750 (44.5)
25	1.820 (46.2)	1.875 (47.6)


PROTECTIVE COVERS - PART NUMBER BREAKDOWN / HOW TO ORDER

TF	501-	11	W-	55	9-	02	
							EYELET OR RING SIZE (SEE TABLE III OR IV)
							ACCESSORY (SEE TABLE II)
							LENGTH 1/2 INCH INCREMENTS (EX. 35 IS 3.5 INCHES) (OMIT FOR STANDARD)
							MATERIAL & FINISH W - ALUMINU W/ O.D. CADMIUM F - ALUMINUM W/ ELECTROLESS NICKEL G - ALUMINUM HARD ANODIZED K - STAINLESS STEEL PASSIVATED A - ALUMINUM BLACK ANODIZE (SEE SECTION B FOR ADDITIONAL MATERIAL/FINISHES)
							SHELL SIZE
							INTERFACE 501 - MIL-DTL-38999 SERIES I (FOR PLUGS) 502 - MIL-DTL-38999 SERIES I (FOR RECEPTACLES)
							BASIC PART NUMBER


LANYARDS




#8 STAINLESS STEEL SASH CHAIN



STAINLESS STEEL WIRE ROPE WITH CHOICE OF JACKET MATERIAL




NYLON ROPE, BLACK




STAINLESS STEEL BEAD CHAIN

TABLE II - LANYARD OPTIONS	
ORDERING CODE	DESCRIPTION
X	NO ACCESSORY
R	STAINLESS STEEL WIRE ROPE, PVC JACKET
B	STAINLESS STEEL BEAD CHAIN
S	STAINLESS STEEL SASH CHAIN
G	NYLON ROPE, BLACK
Y	STAINLESS STEEL WIRE ROPE, NYLON JACKET
T	STAINLESS STEEL WIRE ROPE, TEFLON JACKET

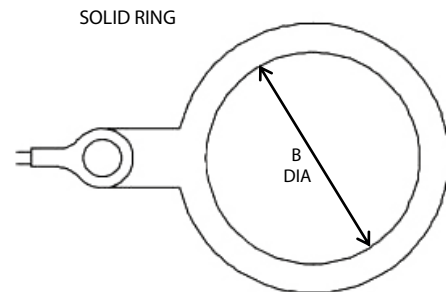

SOLID RING



EYELET

A
DIA


TABLE III EYELET SPECIFICATIONS	
DASH NUMBER	A DIA
00	NO EYELET
01	0.140 (3.6)
02	0.167 (4.2)
03	0.197 (5.0)
04	0.125 (3.2)
05	0.156 (4.0)
06	0.182 (4.6)
07	0.191 (4.9)
08	0.218 (5.5)

TABLE IV SOLID RING SPECIFICATIONS	
DASH NUMBER	B DIA
20	.512 (13.0)
21	.583 (14.8)
22	.709 (18.0)
23	.787 (20.0)
24	.906 (23.0)
25	1.024 (26.0)
26	1.178 (30.0)
27	1.266 (32.2)
28	1.428 (36.3)
29	1.535 (39.0)
30	1.678 (42.6)
31	1.760 (44.7)
32	1.890 (48.0)
33	2.140 (54.4)
34	2.406 (61.1)
35	2.656 (67.5)

DISCLAIMER

ALL INFORMATION IN THIS CATALOG IS BELIEVED TO BE RELIABLE. READERS SHOULD INDEPENDENTLY EVALUATE EACH PRODUCT TO CONFIRM SUITABILITY WITH HIS/HER SPECIFIC APPLICATION. TOPFLITE COMPONENTS MAKES NO WARRANTIES AS TO THE ACCURACY OR COMPLETENESS OF THE INFORMATION AND DISCLAIM ANY LIABILITY REGARDING ITS USE. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. TOPFLITE COMPONENTS PROCESSES OR MATERIALS THAT DO NOT AFFECT COMPLIANCE WITH ANY APPLICABLE SPECIFICATION ARE SUBJECT TO CHANGE WITHOUT NOTICE.

TF510 - FOR PLUGS

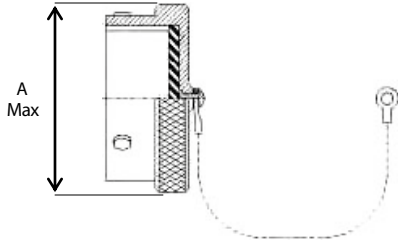

TF511 - FOR RECEPTACLES

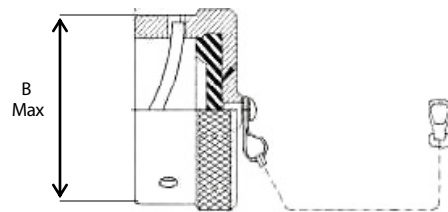


TABLE I—PROTECTIVE COVER DIMENSIONS

SHELL SIZE	A MAX	B MAX
8	.720 (18.3)	.719 (18.3)
10	.850 (21.6)	.812 (20.6)
12	1.000 (25.4)	1.000 (25.4)
14	1.130 (28.7)	1.125 (28.6)
16	1.250 (31.8)	1.250 (31.8)
18	1.380 (35.1)	1.375 (34.9)
20	1.500 (38.1)	1.500 (38.1)
22	1.630 (41.4)	1.625 (41.3)
24	1.750 (44.5)	1.750 (44.5)


PROTECTIVE COVERS - PART NUMBER BREAKDOWN / HOW TO ORDER

TF	510-	11	W-	55	S-	02	
							EYELET OR RING SIZE (SEE TABLE III OR IV)
							ACCESSORY (SEE TABLE II)
							LENGTH 1/2 INCH INCREMENTS (EX. 35 IS 3.5 INCHES) (OMIT FOR STANDARD)
							MATERIAL & FINISH W - ALUMINUM W/ O.D. CADMIUM F - ALUMINUM W/O ELECTROLESS NICKEL G - ALUMINUM HARD ANODIZED K - STAINLESS STEEL PASSIVATED A - ALUMINUM BLACK ANODIZED (SEE SECTION B FOR ADDITIONAL MATERIAL/FINISHES)
							SHELL SIZE
							INTERFACE 510 - MIL-DTL-38999 SERIES II (FOR PLUGS) 511 - MIL-DTL-38999 SERIES II (FOR RECEPTACLES)
							BASIC PART NUMBER


LANYARDS




#8 STAINLESS STEEL SASH CHAIN



STAINLESS STEEL WIRE ROPE WITH CHOICE OF JACKET MATERIAL




NYLON ROPE, BLACK




STAINLESS STEEL BEAD CHAIN

TABLE II - LANYARD OPTIONS	
ORDERING CODE	DESCRIPTION
X	NO ACCESSORY
R	STAINLESS STEEL WIRE ROPE, PVC JACKET
B	STAINLESS STEEL BEAD CHAIN
S	STAINLESS STEEL SASH CHAIN
G	NYLON ROPE, BLACK
Y	STAINLESS STEEL WIRE ROPE, NYLON JACKET
T	STAINLESS STEEL WIRE ROPE, TEFLON JACKET

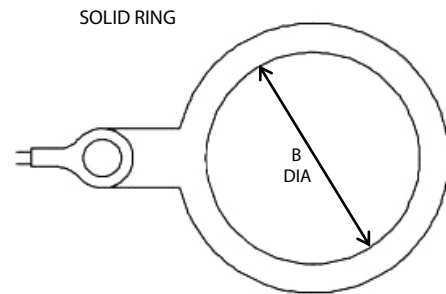

SOLID RING



EYELET

A
DIA

TABLE III EYELET SPECIFICATIONS	
DASH NUMBER	A DIA
00	NO EYELET
01	0.140 (3.6)
02	0.167 (4.2)
03	0.197 (5.0)
04	0.125 (3.2)
05	0.156 (4.0)
06	0.182 (4.6)
07	0.191 (4.9)
08	0.218 (5.5)

TABLE IV SOLID RING SPECIFICATIONS	
DASH NUMBER	B DIA
20	.512 (13.0)
21	.583 (14.8)
22	.709 (18.0)
23	.787 (20.0)
24	.906 (23.0)
25	1.024 (26.0)
26	1.178 (30.0)
27	1.266 (32.2)
28	1.428 (36.3)
29	1.535 (39.0)
30	1.678 (42.6)
31	1.760 (44.7)
32	1.890 (48.0)
33	2.140 (54.4)
34	2.406 (61.1)
35	2.656 (67.5)

DISCLAIMER


ALL INFORMATION IN THIS CATALOG IS BELIEVED TO BE RELIABLE. READERS SHOULD INDEPENDENTLY EVALUATE EACH PRODUCT TO CONFIRM SUITABILITY WITH HIS/HER SPECIFIC APPLICATION. TOPFLITE COMPONENTS MAKES NO WARRANTIES AS TO THE ACCURACY OR COMPLETENESS OF THE INFORMATION AND DISCLAIM ANY LIABILITY REGARDING ITS USE. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. TOPFLITE COMPONENTS PROCESSES OR MATERIALS THAT DO NOT AFFECT COMPLIANCE WITH ANY APPLICABLE SPECIFICATION ARE SUBJECT TO CHANGE WITHOUT NOTICE.

SERIES
591
601

TOPFLITE PROTECTIVE COVER
TF591 & TF601
MIL-DTL-83723 SERIES III THREADED



TF591 - FOR PLUGS

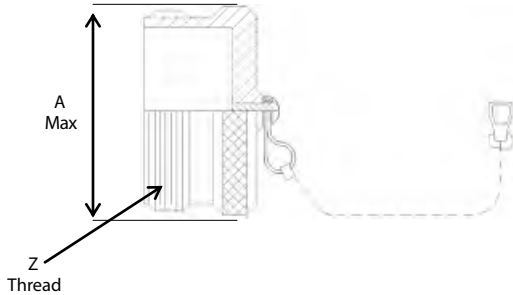

TF601 - FOR RECEPTACLES

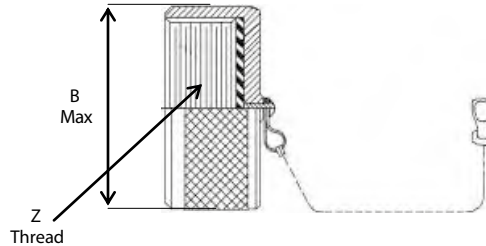


TABLE I—PROTECTIVE COVER DIMENSIONS

SHELL SIZE	Z MAX	A MAX	B MAX
08	9/16 - 24 UNEF	.776 (19.7)	.776 (19.7)
10	11/16 - 24 UNEF	.906 (23.0)	.906 (23.0)
12	7/8 - 20 UNEF	1.078 (27.4)	1.078 (27.4)
14	15/16 - 20 UNEF	1.141 (29.0)	1.141 (29.0)
16	1 1/16 - 18 UNEF	1.266 (32.2)	1.266 (32.2)
18	1 3/16 - 18 UNEF	1.375 (34.9)	1.375 (34.9)
20	1 5/16 - 18 UNEF	1.510 (38.4)	1.510 (38.4)
22	1 7/16 - 18 UNEF	1.625 (41.3)	1.625 (41.3)
24	1 9/16 - 18 UNEF	1.760 (44.7)	1.760 (44.7)


PROTECTIVE COVERS - PART NUMBER BREAKDOWN / HOW TO ORDER

TF	591-	08	W-	55	S-	02	
							EYELET OR RING SIZE (SEE TABLE III OR IV)
							ACCESSORY (SEE TABLE II)
							LENGTH 1/2 INCH INCREMENTS (EX. 35 IS 3.5 INCHES) (OMIT FOR STANDARD)
							MATERIAL & FINISH W - ALUMINUM W/ O.D. CADMIUM F - ALUMINUM W/ ELECTROLESS NICKEL G - ALUMINUM HARD ANODIZED K - STAINLESS STEEL PASSIVATED A - ALUMINUM BLACK ANODIZED (SEE SECTION B FOR ADDITIONAL MATERIAL/FINISHES)
							SHELL SIZE
							INTERFACE 591 - MIL-DTL-83723 SERIES III (FOR PLUGS) 601 - MIL-DTL-83723 SERIES III (FOR RECEPTACLES)
							BASIC PART NUMBER


LANYARDS




#8 STAINLESS STEEL SASH CHAIN



STAINLESS STEEL WIRE ROPE WITH CHOICE OF JACKET MATERIAL




NYLON ROPE, BLACK




STAINLESS STEEL BEAD CHAIN

TABLE II - LANYARD OPTIONS	
ORDERING CODE	DESCRIPTION
X	NO ACCESSORY
R	STAINLESS STEEL WIRE ROPE, PVC JACKET
B	STAINLESS STEEL BEAD CHAIN
S	STAINLESS STEEL SASH CHAIN
G	NYLON ROPE, BLACK
Y	STAINLESS STEEL WIRE ROPE, NYLON JACKET
T	STAINLESS STEEL WIRE ROPE, TEFLON JACKET

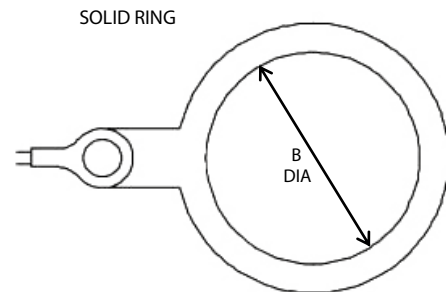

SOLID RING



EYELET

A
DIA

TABLE III EYELET SPECIFICATIONS	
DASH NUMBER	A DIA
00	NO EYELET
01	0.140 (3.6)
02	0.167 (4.2)
03	0.197 (5.0)
04	0.125 (3.2)
05	0.156 (4.0)
06	0.182 (4.6)
07	0.191 (4.9)
08	0.218 (5.5)

TABLE IV SOLID RING SPECIFICATIONS	
DASH NUMBER	B DIA
20	.512 (13.0)
21	.583 (14.8)
22	.709 (18.0)
23	.787 (20.0)
24	.906 (23.0)
25	1.024 (26.0)
26	1.178 (30.0)
27	1.266 (32.2)
28	1.428 (36.3)
29	1.535 (39.0)
30	1.678 (42.6)
31	1.760 (44.7)
32	1.890 (48.0)
33	2.140 (54.4)
34	2.406 (61.1)
35	2.656 (67.5)

DISCLAIMER


ALL INFORMATION IN THIS CATALOG IS BELIEVED TO BE RELIABLE. READERS SHOULD INDEPENDENTLY EVALUATE EACH PRODUCT TO CONFIRM SUITABILITY WITH HIS/HER SPECIFIC APPLICATION. TOPFLITE COMPONENTS MAKES NO WARRANTIES AS TO THE ACCURACY OR COMPLETENESS OF THE INFORMATION AND DISCLAIM ANY LIABILITY REGARDING ITS USE. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. TOPFLITE COMPONENTS PROCESSES OR MATERIALS THAT DO NOT AFFECT COMPLIANCE WITH ANY APPLICABLE SPECIFICATION ARE SUBJECT TO CHANGE WITHOUT NOTICE.

SERIES
592
602

TOPFLITE PROTECTIVE COVER
TF592 & TF602
MIL-DTL-83723 SERIES III BAYONET



TF592 - FOR PLUGS

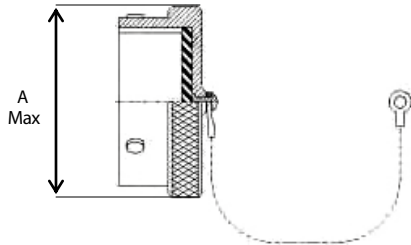

TF602 - FOR RECEPTACLES

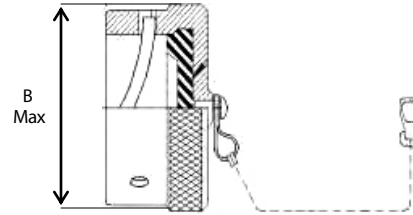


TABLE I—PROTECTIVE COVER DIMENSIONS

SHELL SIZE	A MAX	B MAX
08	.776 (19.7)	.776 (19.7)
10	.906 (23.0)	.906 (23.0)
12	1.078 (27.4)	1.078 (27.4)
14	1.141 (29.0)	1.141 (29.0)
16	1.266 (32.2)	1.266 (32.2)
18	1.375 (34.9)	1.375 (34.9)
20	1.510 (38.4)	1.510 (38.4)
22	1.625 (41.3)	1.625 (41.3)
24	1.760 (44.7)	1.760 (44.7)


PROTECTIVE COVERS - PART NUMBER BREAKDOWN / HOW TO ORDER

TF	592-	08	W-	55	S-	02	
							EYELET OR RING SIZE (SEE TABLE III OR IV)
							ACCESSORY (SEE TABLE II)
							LENGTH 1/2 INCH INCREMENTS (EX. 35 IS 3.5 INCHES) (OMIT FOR STANDARD)
							MATERIAL & FINISH W - ALUMINUM W/ O.D. CADMIUM F - ALUMINUM W/ ELECTROLESS NICKEL G - ALUMINUM HARD ANODIZED K - STAINLESS STEEL PASSIVATED A - ALUMINUM BLACK ANODIZE (SEE SECTION B FOR ADDITIONAL MATERIAL/FINISHES)
							SHELL SIZE
							INTERFACE 592 - MIL-DTL-83723 SERIES III (FOR PLUGS) 602 - MIL-DTL-83723 SERIES III (FOR RECEPTACLES)
							BASIC PART NUMBER


LANYARDS




#8 STAINLESS STEEL SASH CHAIN



STAINLESS STEEL WIRE ROPE WITH CHOICE OF JACKET MATERIAL




NYLON ROPE, BLACK




STAINLESS STEEL BEAD CHAIN

TABLE II - LANYARD OPTIONS	
ORDERING CODE	DESCRIPTION
X	NO ACCESSORY
R	STAINLESS STEEL WIRE ROPE, PVC JACKET
B	STAINLESS STEEL BEAD CHAIN
S	STAINLESS STEEL SASH CHAIN
G	NYLON ROPE, BLACK
Y	STAINLESS STEEL WIRE ROPE, NYLON JACKET
T	STAINLESS STEEL WIRE ROPE, TEFLON JACKET

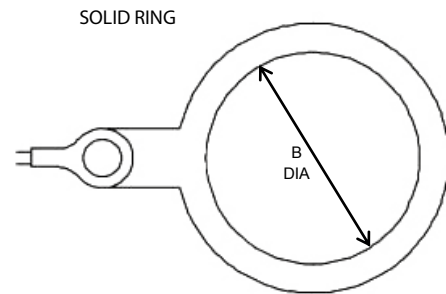

SOLID RING



EYELET

A
DIA


TABLE III EYELET SPECIFICATIONS	
DASH NUMBER	A DIA
00	NO EYELET
01	0.140 (3.6)
02	0.167 (4.2)
03	0.197 (5.0)
04	0.125 (3.2)
05	0.156 (4.0)
06	0.182 (4.6)
07	0.191 (4.9)
08	0.218 (5.5)

TABLE IV SOLID RING SPECIFICATIONS	
DASH NUMBER	B DIA
20	.512 (13.0)
21	.583 (14.8)
22	.709 (18.0)
23	.787 (20.0)
24	.906 (23.0)
25	1.024 (26.0)
26	1.178 (30.0)
27	1.266 (32.2)
28	1.428 (36.3)
29	1.535 (39.0)
30	1.678 (42.6)
31	1.760 (44.7)
32	1.890 (48.0)
33	2.140 (54.4)
34	2.406 (61.1)
35	2.656 (67.5)

DISCLAIMER

ALL INFORMATION IN THIS CATALOG IS BELIEVED TO BE RELIABLE. READERS SHOULD INDEPENDENTLY EVALUATE EACH PRODUCT TO CONFIRM SUITABILITY WITH HIS/HER SPECIFIC APPLICATION. TOPFLITE COMPONENTS MAKES NO WARRANTIES AS TO THE ACCURACY OR COMPLETENESS OF THE INFORMATION AND DISCLAIM ANY LIABILITY REGARDING ITS USE. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. TOPFLITE COMPONENTS PROCESSES OR MATERIALS THAT DO NOT AFFECT COMPLIANCE WITH ANY APPLICABLE SPECIFICATION ARE SUBJECT TO CHANGE WITHOUT NOTICE.

TFM12 – EXTERNAL THREAD

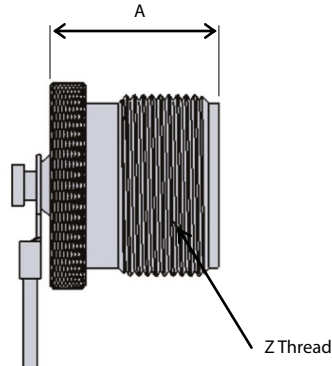

TFM11 – INTERNAL THREAD

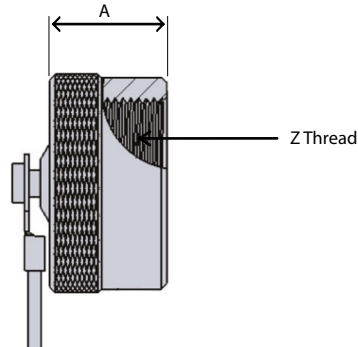


TABLE 1 – PROTECTIVE COVER DIMENSIONS		
SIZE	A MAX	Z THREAD
01	0.250	M4X0.7
02	0.250	M5X0.8
03	0.250	M6X1.0
04	0.250	M6X0.75
05	0.250	M7X1.0
06	0.375	M8X1.25
07	0.375	M8X1.0
08	0.375	M10X1.5
09	0.375	M10X1.25
10	0.375	M10X1.0
11	0.375	M12X1.75
12	0.375	M12X1.5


TABLE 1 – PROTECTIVE COVER DIMENSIONS		
SIZE	A MAX	Z THREAD
13	0.375	M12X1.25
14	0.500	M14X2.0
15	0.500	M16X2.0
16	0.500	M16X1.5
17	0.500	M18X2.5
18	0.500	M20X2.5
19	0.500	M20X1.5
20	0.650	M22X2.5
21	0.650	M24X3.0
22	0.650	M27X3.0
23	0.650	M30X3.5

PROTECTIVE COVERS - PART NUMBER BREAKDOWN / HOW TO ORDER						
TFM	11-	10	W-	55	S-	02
EYELET OR RING SIZE (SEE TABLE III OR IV)						
ACCESSORY (SEE TABLE II)						
LENGTH 1/2 INCH INCREMENTS (EX. 35 IS 3.5 INCHES)						
MATERIAL & FINISH W - ALUMINUM W/ O.D. CADMIUM F - ALUMINUM W/ ELECTROLESS NICKEL G - ALUMINUM HARD ANODIZED K - STAINLESS STEEL PASSIVATED A - ALUMINUM BLACK ANODIZE (SEE SECTION B FOR ADDITIONAL MATERIAL/FINISHES)						
SHELL SIZE						
INTERFACE 11 - INTERNAL THREAD STYLE 12 - EXTERNAL THREAD STYLE						
BASIC PART NUMBER						


LANYARDS




#8 STAINLESS STEEL SASH CHAIN



STAINLESS STEEL WIRE ROPE WITH CHOICE OF JACKET MATERIAL



NYLON ROPE, BLACK



STAINLESS STEEL BEAD CHAIN

TABLE II - LANYARD OPTIONS	
ORDERING CODE	DESCRIPTION
X	NO ACCESSORY
R	STAINLESS STEEL WIRE ROPE, PVC JACKET
B	STAINLESS STEEL BEAD CHAIN
S	STAINLESS STEEL SASH CHAIN
G	NYLON ROPE, BLACK
Y	STAINLESS STEEL WIRE ROPE, NYLON JACKET
T	STAINLESS STEEL WIRE ROPE, TEFLON JACKET

SOLID RING


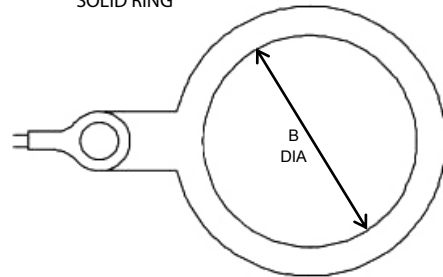



TABLE III EYELET SPECIFICATIONS	
DASH NUMBER	A DIA
00	NO EYELET
01	0.140 (3.6)
02	0.167 (4.2)
03	0.197 (5.0)
04	0.125 (3.2)
05	0.156 (4.0)
06	0.182 (4.6)
07	0.191 (4.9)
08	0.218 (5.5)

TABLE IV SOLID RING SPECIFICATIONS	
DASH NUMBER	B DIA
20	.512 (13.0)
21	.583 (14.8)
22	.709 (18.0)
23	.787 (20.0)
24	.906 (23.0)
25	1.024 (26.0)
26	1.178 (30.0)
27	1.266 (32.2)
28	1.428 (36.3)
29	1.535 (39.0)
30	1.678 (42.6)
31	1.760 (44.7)
32	1.890 (48.0)
33	2.140 (54.4)
34	2.406 (61.1)
35	2.656 (67.5)

DISCLAIMER

ALL INFORMATION IN THIS CATALOG IS BELIEVED TO BE RELIABLE. READERS SHOULD INDEPENDENTLY EVALUATE EACH PRODUCT TO CONFIRM SUITABILITY WITH HIS/HER SPECIFIC APPLICATION. TOPFLITE COMPONENTS MAKES NO WARRANTIES AS TO THE ACCURACY OR COMPLETENESS OF THE INFORMATION AND DISCLAIM ANY LIABILITY REGARDING ITS USE. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. TOPFLITE COMPONENTS PROCESSES OR MATERIALS THAT DO NOT AFFECT COMPLIANCE WITH ANY APPLICABLE SPECIFICATION ARE SUBJECT TO CHANGE WITHOUT NOTICE.

TFS22 – EXTERNAL THREAD

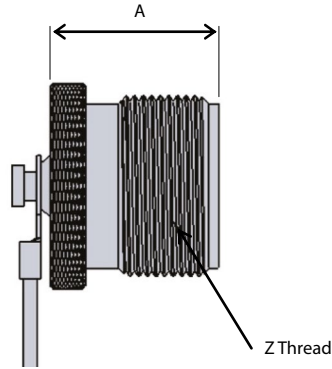

TFS21 – INTERNAL THREAD

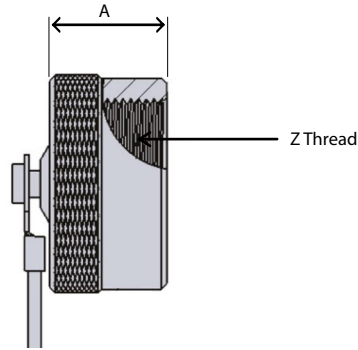


TABLE 1 – PROTECTIVE COVER DIMENSIONS		
SIZE	A MAX	Z THREAD
01	0.250	6-32
02	0.250	8-32
03	0.250	10-24
04	0.250	10-32
05	0.250	12-24
06	0.375	¼-20
07	0.375	¼-28
08	0.375	5/16-18
09	0.375	5/16-24
10	0.375	3/8-16
11	0.375	3/8-24

TABLE 1 – PROTECTIVE COVER DIMENSIONS		
SIZE	A MAX	Z THREAD
12	0.375	7/16-14
13	0.375	7/16-20
14	0.500	½-13
15	0.500	½-20
16	0.500	9/16-12
17	0.500	9/16-18
18	0.500	5/8-11
19	0.500	5/8-18
20	0.650	¾-10
21	0.650	¾-16
22	0.650	7/8-9

TABLE 1 – PROTECTIVE COVER DIMENSIONS		
SIZE	A MAX	Z THREAD
23	0.650	7/8-14
24	0.650	1-8
25	0.650	1-12
26	0.650	1-14
27	0.650	1-1/8-7
28	0.650	1-1/8-12
29	0.750	1-1/4-7
30	0.750	1-1/4-12
31	0.750	1-3/8-6
32	0.750	1-1/2-6
33	0.750	1-1/2-12


PROTECTIVE COVERS - PART NUMBER BREAKDOWN / HOW TO ORDER

TFS	21-	10	W-	55	S-	02	
							EYELET OR RING SIZE (SEE TABLE III OR IV)
							ACCESSORY (SEE TABLE II)
							LENGTH 1/2 INCH INCREMENTS (EX. 35 IS 3.5 INCHES)
							MATERIAL & FINISH W - ALUMINUM W/ O.D. CADMIUM F - ALUMINUM W/ ELECTROLESS NICKEL G - ALUMINUM HARD ANODIZED K - STAINLESS STEEL PASSIVATED A - ALUMINUM BLACK ANODIZE (SEE SECTION B FOR ADDITIONAL MATERIAL/FINISHES)
							SHELL SIZE
							INTERFACE 21 - INTERNAL THREAD STYLE 22 - EXTERNAL THREAD STYLE
							BASIC PART NUMBER


LANYARDS




#8 STAINLESS STEEL SASH CHAIN



STAINLESS STEEL WIRE ROPE WITH CHOICE OF JACKET MATERIAL



NYLON ROPE, BLACK



STAINLESS STEEL BEAD CHAIN

TABLE II - LANYARD OPTIONS	
ORDERING CODE	DESCRIPTION
X	NO ACCESSORY
R	STAINLESS STEEL WIRE ROPE, PVC JACKET
B	STAINLESS STEEL BEAD CHAIN
S	STAINLESS STEEL SASH CHAIN
G	NYLON ROPE, BLACK
Y	STAINLESS STEEL WIRE ROPE, NYLON JACKET
T	STAINLESS STEEL WIRE ROPE, TEFLON JACKET

SOLID RING


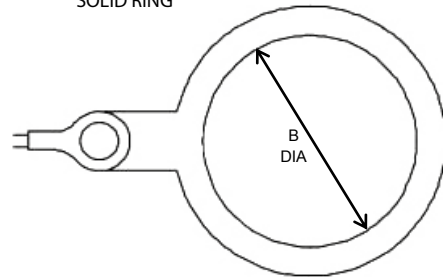



TABLE III EYELET SPECIFICATIONS	
DASH NUMBER	A DIA
00	NO EYELET
01	0.140 (3.6)
02	0.167 (4.2)
03	0.197 (5.0)
04	0.125 (3.2)
05	0.156 (4.0)
06	0.182 (4.6)
07	0.191 (4.9)
08	0.218 (5.5)

TABLE IV SOLID RING SPECIFICATIONS	
DASH NUMBER	B DIA
20	.512 (13.0)
21	.583 (14.8)
22	.709 (18.0)
23	.787 (20.0)
24	.906 (23.0)
25	1.024 (26.0)
26	1.178 (30.0)
27	1.266 (32.2)
28	1.428 (36.3)
29	1.535 (39.0)
30	1.678 (42.6)
31	1.760 (44.7)
32	1.890 (48.0)
33	2.140 (54.4)
34	2.406 (61.1)
35	2.656 (67.5)

DISCLAIMER

ALL INFORMATION IN THIS CATALOG IS BELIEVED TO BE RELIABLE. READERS SHOULD INDEPENDENTLY EVALUATE EACH PRODUCT TO CONFIRM SUITABILITY WITH HIS/HER SPECIFIC APPLICATION. TOPFLITE COMPONENTS MAKES NO WARRANTIES AS TO THE ACCURACY OR COMPLETENESS OF THE INFORMATION AND DISCLAIM ANY LIABILITY REGARDING ITS USE. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. TOPFLITE COMPONENTS PROCESSES OR MATERIALS THAT DO NOT AFFECT COMPLIANCE WITH ANY APPLICABLE SPECIFICATION ARE SUBJECT TO CHANGE WITHOUT NOTICE.

R - RECEPTACLE CAP



P - PLUG CAP




TABLE 1 - PROTECTIVE COVER DIMENSIONS

SHELL SIZE	A MAX	B Ø	C MAX	THREAD
08	1.180	0.800	1.062	M17X1.0
10	1.500	1.000	1.250	M21X1.0
14	1.500	1.300	1.300	M29X1.0
20	2.000	1.750	1.850	M41X1.0


PROTECTIVE COVERS - PART NUMBER BREAKDOWN / HOW TO ORDER

TF-JUP	-08	P	W-	55	S-	02	
							EYELET OR RING SIZE (SEE TABLE III OR IV)
							ACCESSORY (SEE TABLE II)
							LENGTH 1/2 INCH INCREMENTS (EX. 35 IS 3.5 INCHES)
							MATERIAL & FINISH W - ALUMINUM W/ O.D. CADMIUM F - ALUMINUM W/ ELECTROLESS NICKEL G - ALUMINUM HARD ANODIZED K - STAINLESS STEEL PASSIVATED A - ALUMINUM BLACK ANODIZE (OMIT FOR BRASS W/ELECTROLESS NICKEL PLATE)
							(SEE SECTION B FOR ADDITIONAL MATERIAL/FINISHES)
							P - PLUG CAP EXTERNAL THREAD R - RECEPTACLE CAP INTERNAL THREAD
							SHELL SIZE
							BASIC PART NUMBER


LANYARDS




#8 STAINLESS STEEL SASH CHAIN



STAINLESS STEEL WIRE ROPE WITH CHOICE OF JACKET MATERIAL



NYLON ROPE, BLACK



STAINLESS STEEL BEAD CHAIN

TABLE II - LANYARD OPTIONS	
ORDERING CODE	DESCRIPTION
X	NO ACCESSORY
R	STAINLESS STEEL WIRE ROPE, PVC JACKET
B	STAINLESS STEEL BEAD CHAIN
S	STAINLESS STEEL SASH CHAIN
G	NYLON ROPE, BLACK
Y	STAINLESS STEEL WIRE ROPE, NYLON JACKET
T	STAINLESS STEEL WIRE ROPE, TEFLON JACKET

SOLID RING


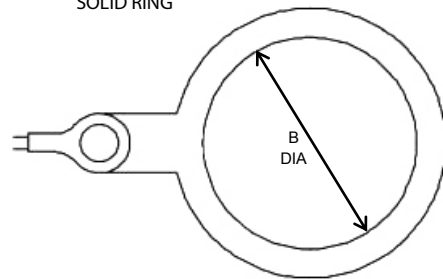


TABLE III EYELET SPECIFICATIONS	
DASH NUMBER	A DIA
00	NO EYELET
01	0.140 (3.6)
02	0.167 (4.2)
03	0.197 (5.0)
04	0.125 (3.2)
05	0.156 (4.0)
06	0.182 (4.6)
07	0.191 (4.9)
08	0.218 (5.5)

TABLE IV SOLID RING SPECIFICATIONS	
DASH NUMBER	B DIA
20	.512 (13.0)
21	.583 (14.8)
22	.709 (18.0)
23	.787 (20.0)
24	.906 (23.0)
25	1.024 (26.0)
26	1.178 (30.0)
27	1.266 (32.2)
28	1.428 (36.3)
29	1.535 (39.0)
30	1.678 (42.6)
31	1.760 (44.7)
32	1.890 (48.0)
33	2.140 (54.4)
34	2.406 (61.1)
35	2.656 (67.5)

DISCLAIMER

ALL INFORMATION IN THIS CATALOG IS BELIEVED TO BE RELIABLE. READERS SHOULD INDEPENDENTLY EVALUATE EACH PRODUCT TO CONFIRM SUITABILITY WITH HIS/HER SPECIFIC APPLICATION. TOPFLITE COMPONENTS MAKES NO WARRANTIES AS TO THE ACCURACY OR COMPLETENESS OF THE INFORMATION AND DISCLAIM ANY LIABILITY REGARDING ITS USE. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. TOPFLITE COMPONENTS PROCESSES OR MATERIALS THAT DO NOT AFFECT COMPLIANCE WITH ANY APPLICABLE SPECIFICATION ARE SUBJECT TO CHANGE WITHOUT NOTICE.