


TF80 - FOR PLUGS

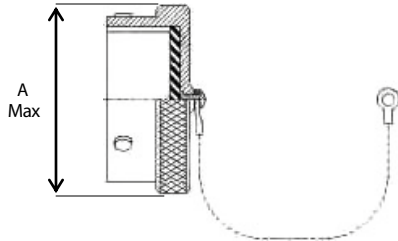

TF81 - FOR RECEPTACLES

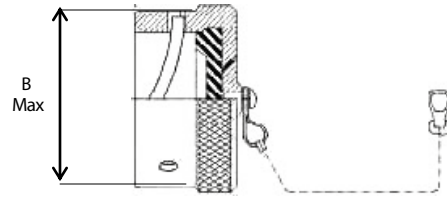


TABLE I—PROTECTIVE COVER DIMENSIONS

| SHELL SIZE | A MAX | B MAX |
|------------|--------------|--------------|
| 08 | .719 (18.3) | .734 (18.6) |
| 10 | .844 (21.4) | .859 (21.8) |
| 12 | 1.000 (25.4) | 1.000 (25.4) |
| 14 | 1.125 (28.6) | 1.125 (28.6) |
| 16 | 1.250 (31.8) | 1.250 (31.8) |
| 18 | 1.375 (34.9) | 1.375 (34.9) |
| 20 | 1.500 (38.1) | 1.500 (38.1) |
| 22 | 1.625 (41.3) | 1.625 (41.3) |
| 24 | 1.750 (44.5) | 1.750 (44.5) |


PROTECTIVE COVERS - PART NUMBER BREAKDOWN / HOW TO ORDER

| | | | | | | | |
|----|-----|----|----|----|----|----|--|
| TF | 80- | 10 | W- | 55 | S- | 02 | |
| | | | | | | | EYELET OR RING SIZE (SEE TABLE III OR IV) |
| | | | | | | | ACCESSORY (SEE TABLE II) |
| | | | | | | | LENGTH 1/2 INCH INCREMENTS (EX. 35 IS 3.5 INCHES) (OMIT FOR STANDARD) |
| | | | | | | | MATERIAL & FINISH W - ALUMINUM W/ O.D. CADMIUM F - ALUMINUM W/ ELECTROLESS NICKEL G - ALUMINUM HARD ANODIZED K - STAINLESS STEEL PASSIVATED A - ALUMINUM BLACK ANODIZED (SEE SECTION B FOR ADDITIONAL MATERIAL/FINISHES) |
| | | | | | | | SHELL SIZE |
| | | | | | | | INTERFACE 80 - MIL-DTL-26482 (FOR PLUGS) 81 - MIL-DTL-26482 (FOR RECEPTACLES) |
| | | | | | | | BASIC PART NUMBER |


LANYARDS




#8 STAINLESS STEEL SASH CHAIN



STAINLESS STEEL WIRE ROPE WITH CHOICE OF JACKET MATERIAL




NYLON ROPE, BLACK




STAINLESS STEEL BEAD CHAIN

| TABLE II - LANYARD OPTIONS | |
|----------------------------|--|
| ORDERING CODE | DESCRIPTION |
| X | NO ACCESSORY |
| R | STAINLESS STEEL WIRE ROPE, PVC JACKET |
| B | STAINLESS STEEL BEAD CHAIN |
| S | STAINLESS STEEL SASH CHAIN |
| G | NYLON ROPE, BLACK |
| Y | STAINLESS STEEL WIRE ROPE, NYLON JACKET |
| T | STAINLESS STEEL WIRE ROPE, TEFLON JACKET |

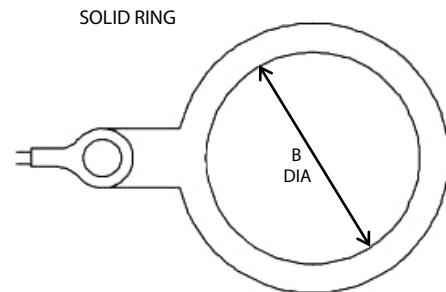

SOLID RING



EYELET

A
DIA

| TABLE III EYELET SPECIFICATIONS | |
|------------------------------------|-------------|
| DASH NUMBER | A DIA |
| 00 | NO EYELET |
| 01 | 0.140 (3.6) |
| 02 | 0.167 (4.2) |
| 03 | 0.197 (5.0) |
| 04 | 0.125 (3.2) |
| 05 | 0.156 (4.0) |
| 06 | 0.182 (4.6) |
| 07 | 0.191 (4.9) |
| 08 | 0.218 (5.5) |

| TABLE IV SOLID RING SPECIFICATIONS | |
|---------------------------------------|--------------|
| DASH NUMBER | B DIA |
| 20 | .512 (13.0) |
| 21 | .583 (14.8) |
| 22 | .709 (18.0) |
| 23 | .787 (20.0) |
| 24 | .906 (23.0) |
| 25 | 1.024 (26.0) |
| 26 | 1.178 (30.0) |
| 27 | 1.266 (32.2) |
| 28 | 1.428 (36.3) |
| 29 | 1.535 (39.0) |
| 30 | 1.678 (42.6) |
| 31 | 1.760 (44.7) |
| 32 | 1.890 (48.0) |
| 33 | 2.140 (54.4) |
| 34 | 2.406 (61.1) |
| 35 | 2.656 (67.5) |

DISCLAIMER

ALL INFORMATION IN THIS CATALOG IS BELIEVED TO BE RELIABLE. READERS SHOULD INDEPENDENTLY EVALUATE EACH PRODUCT TO CONFIRM SUITABILITY WITH HIS/HER SPECIFIC APPLICATION. TOPFLITE COMPONENTS MAKES NO WARRANTIES AS TO THE ACCURACY OR COMPLETENESS OF THE INFORMATION AND DISCLAIM ANY LIABILITY REGARDING ITS USE. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. TOPFLITE COMPONENTS PROCESSES OR MATERIALS THAT DO NOT AFFECT COMPLIANCE WITH ANY APPLICABLE SPECIFICATION ARE SUBJECT TO CHANGE WITHOUT NOTICE.