


TFS22 – EXTERNAL THREAD

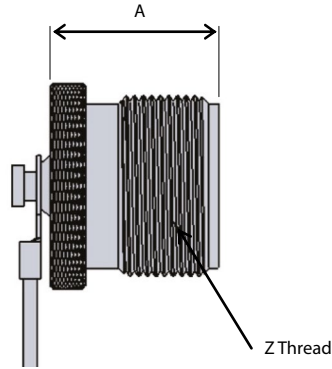

TFS21 – INTERNAL THREAD

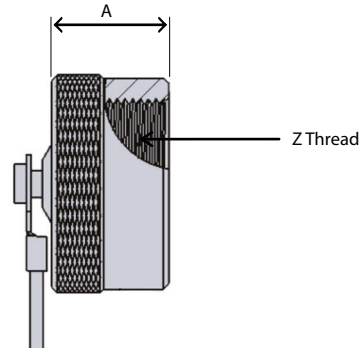


TABLE 1 – PROTECTIVE COVER DIMENSIONS		
SIZE	A MAX	Z THREAD
01	0.250	6-32
02	0.250	8-32
03	0.250	10-24
04	0.250	10-32
05	0.250	12-24
06	0.375	¼-20
07	0.375	¼-28
08	0.375	5/16-18
09	0.375	5/16-24
10	0.375	3/8-16
11	0.375	3/8-24

TABLE 1 – PROTECTIVE COVER DIMENSIONS		
SIZE	A MAX	Z THREAD
12	0.375	7/16-14
13	0.375	7/16-20
14	0.500	½-13
15	0.500	½-20
16	0.500	9/16-12
17	0.500	9/16-18
18	0.500	5/8-11
19	0.500	5/8-18
20	0.650	¾-10
21	0.650	¾-16
22	0.650	7/8-9


TABLE 1 – PROTECTIVE COVER DIMENSIONS		
SIZE	A MAX	Z THREAD
23	0.650	7/8-14
24	0.650	1-8
25	0.650	1-12
26	0.650	1-14
27	0.650	1-1/8-7
28	0.650	1-1/8-12
29	0.750	1-1/4-7
30	0.750	1-1/4-12
31	0.750	1-3/8-6
32	0.750	1-1/2-6
33	0.750	1-1/2-12

PROTECTIVE COVERS - PART NUMBER BREAKDOWN / HOW TO ORDER						
TFS	21-	10	W-	55	S-	02
EYELET OR RING SIZE (SEE TABLE III OR IV)						
ACCESSORY (SEE TABLE II)						
LENGTH 1/2 INCH INCREMENTS (EX. 35 IS 3.5 INCHES)						
MATERIAL & FINISH W - ALUMINUM W/ O.D. CADMIUM F - ALUMINUM W/ ELECTROLESS NICKEL G - ALUMINUM HARD ANODIZED K - STAINLESS STEEL PASSIVATED A - ALUMINUM BLACK ANODIZE (SEE SECTION B FOR ADDITIONAL MATERIAL/FINISHES)						
SHELL SIZE						
INTERFACE 21 - INTERNAL THREAD STYLE 22 - EXTERNAL THREAD STYLE						
BASIC PART NUMBER						


LANYARDS




#8 STAINLESS STEEL SASH CHAIN



STAINLESS STEEL WIRE ROPE WITH CHOICE OF JACKET MATERIAL



NYLON ROPE, BLACK



STAINLESS STEEL BEAD CHAIN

TABLE II - LANYARD OPTIONS	
ORDERING CODE	DESCRIPTION
X	NO ACCESSORY
R	STAINLESS STEEL WIRE ROPE, PVC JACKET
B	STAINLESS STEEL BEAD CHAIN
S	STAINLESS STEEL SASH CHAIN
G	NYLON ROPE, BLACK
Y	STAINLESS STEEL WIRE ROPE, NYLON JACKET
T	STAINLESS STEEL WIRE ROPE, TEFLON JACKET

SOLID RING


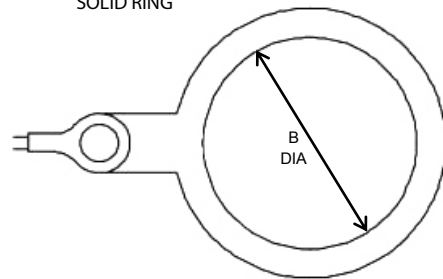


TABLE III EYELET SPECIFICATIONS	
DASH NUMBER	A DIA
00	NO EYELET
01	0.140 (3.6)
02	0.167 (4.2)
03	0.197 (5.0)
04	0.125 (3.2)
05	0.156 (4.0)
06	0.182 (4.6)
07	0.191 (4.9)
08	0.218 (5.5)

TABLE IV SOLID RING SPECIFICATIONS	
DASH NUMBER	B DIA
20	.512 (13.0)
21	.583 (14.8)
22	.709 (18.0)
23	.787 (20.0)
24	.906 (23.0)
25	1.024 (26.0)
26	1.178 (30.0)
27	1.266 (32.2)
28	1.428 (36.3)
29	1.535 (39.0)
30	1.678 (42.6)
31	1.760 (44.7)
32	1.890 (48.0)
33	2.140 (54.4)
34	2.406 (61.1)
35	2.656 (67.5)

DISCLAIMER

ALL INFORMATION IN THIS CATALOG IS BELIEVED TO BE RELIABLE. READERS SHOULD INDEPENDENTLY EVALUATE EACH PRODUCT TO CONFIRM SUITABILITY WITH HIS/HER SPECIFIC APPLICATION. TOPFLITE COMPONENTS MAKES NO WARRANTIES AS TO THE ACCURACY OR COMPLETENESS OF THE INFORMATION AND DISCLAIM ANY LIABILITY REGARDING ITS USE. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. TOPFLITE COMPONENTS PROCESSES OR MATERIALS THAT DO NOT AFFECT COMPLIANCE WITH ANY APPLICABLE SPECIFICATION ARE SUBJECT TO CHANGE WITHOUT NOTICE.