

# TOPFLITE PROTECTIVE COVER S21 & S22 STANDARD THREADED CAPS

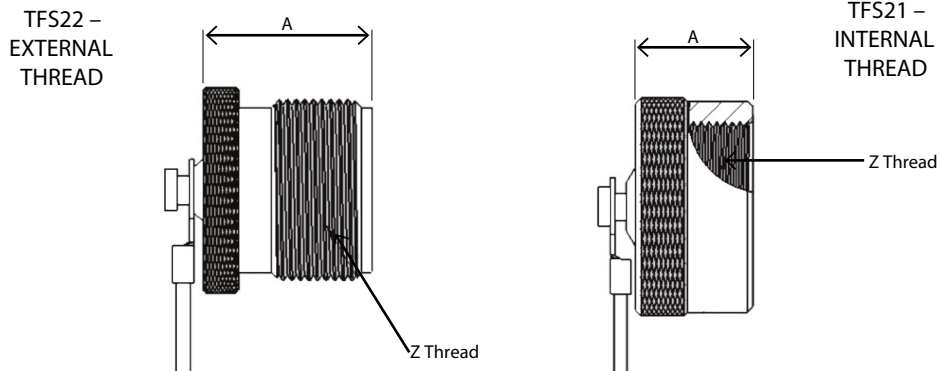


TABLE 1 – PROTECTIVE COVER DIMENSIONS		
SIZE	A MAX	Z THREAD
01	0.250	6-32
02	0.250	8-32
03	0.250	10-24
04	0.250	10-32
05	0.250	12-24
06	0.375	1/4-20
07	0.375	1/4-28
08	0.375	5/16-18
09	0.375	5/16-24
10	0.375	3/8-16
11	0.375	3/8-24

TABLE 1 – PROTECTIVE COVER DIMENSIONS		
SIZE	A MAX	Z THREAD
12	0.375	7/16-14
13	0.375	7/16-20
14	0.500	1/2-13
15	0.500	1/2-20
16	0.500	9/16-12
17	0.500	9/16-18
18	0.500	5/8-11
19	0.500	5/8-18
20	0.650	3/8-10
21	0.650	3/8-16
22	0.650	7/8-9

TABLE 1 – PROTECTIVE COVER DIMENSIONS		
SIZE	A MAX	Z THREAD
23	0.650	7/8-14
24	0.650	1-8
25	0.650	1-12
26	0.650	1-14
27	0.650	1-1/8-7
28	0.650	1-1/8-12
29	0.750	1-1/4-7
30	0.750	1-1/4-12
31	0.750	1-3/8-6
32	0.750	1-1/2-6
33	0.750	1-1/2-12

Additional thread sizes available, please consult factory

PART NUMBER BREAKDOWN							
<b>EXAMPLE PART NUMBER</b>	TFS	21-	10	W-	55	S-	02
<b>BASIC PART NUMBER</b>							
<b>INTERFACE</b>	21 - INTERNAL THREAD STYLE 22 - EXTERNAL THREAD STYLE						
<b>SHELL SIZE</b>							
<b>MATERIAL/ FINISH</b>	W - ALUMINUM W/ O.D. CADMIUM F - ALUMINUM W/ ELECTROLESS NICKEL G - ALUMINUM HARD ANODIZED K - STAINLESS STEEL PASSIVATED A - ALUMINUM BLACK ANODIZED (SEE PAGE 4 FOR ADDITIONAL MATERIALS/FINISHES)						
<b>LANYARD LENGTH</b>	1/2 INCH INCREMENTS (EX. 35 IS 3.5 INCHES)						
<b>ACCESSORY</b>	(SEE PAGE 8)						
<b>EYELET OR RING SIZE</b>	(SEE PAGE 8)						