

TOPFLITE PROTECTIVE COVER

TF42 & TF43

MIL-DTL-5015

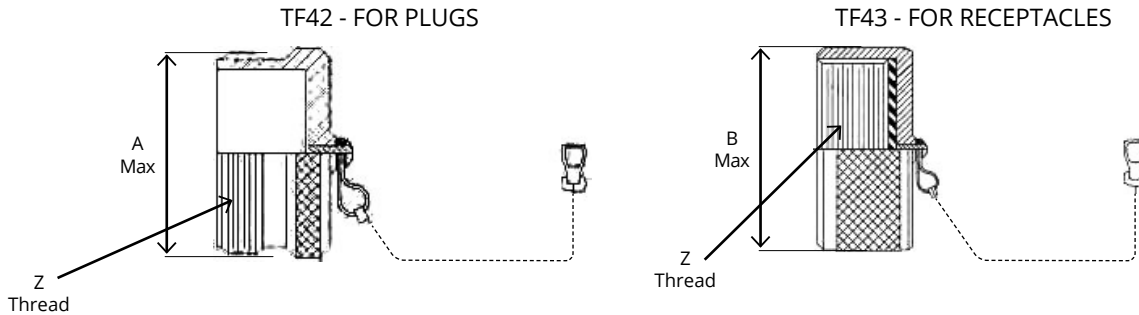


TABLE - PROTECTIVE COVER DIMENSIONS

SHELL SIZE	Z THREAD	A MAX	B MAX
08	1/2 - 28 UNEF	.562 (14.3)	.688 (17.5)
10	5/8 - 24 UNEF	.687 (17.4)	.815 (20.7)
12	3/4 - 20 UNEF	.812 (20.6)	1.000 (25.4)
14	7/8 - 20 UNEF	.937 (23.8)	1.125 (28.6)
16	1 - 20 UNEF	1.062 (27.0)	1.188 (30.2)
18	1 1/8 - 18 UNEF	1.187 (30.1)	1.344 (34.1)
20	1 1/4 - 18 UNEF	1.312 (33.3)	1.469 (37.3)
22	1 3/8 - 18 UNEF	1.437 (36.5)	1.594 (40.5)
24	1 1/2 - 18 UNEF	1.562 (39.7)	1.719 (43.7)
28	1 3/4 - 18 UNS	1.812 (46.0)	1.969 (50.0)
32	2 - 18 UNS	2.062 (52.4)	2.219 (56.4)
36	2 1/4 - 16 UN	2.312 (58.7)	2.469 (62.7)
40	2 1/2 - 16 UN	2.562 (65.1)	2.719 (69.1)
44	2 3/4 - 16 UN	2.812 (71.4)	2.969 (75.4)
48	3 - 16 UN	3.062 (77.8)	3.188 (81.0)

PART NUMBER BREAKDOWN

EXAMPLE PART NUMBER	TF	42-	10	W-	55	S-	02
BASIC PART NUMBER							
INTERFACE	42 - MIL-DTL-5015 (FOR PLUGS) 43 - MIL-DTL-5015 (FOR RECEPTACLES)						
SHELL SIZE							
MATERIAL/ FINISH	W - ALUMINUM W/ O.D. CADMIUM F - ALUMINUM W/ ELECTROLESS NICKEL G - ALUMINUM HARD ANODIZED K - STAINLESS STEEL PASSIVATED A - ALUMINUM BLACK ANODIZED (SEE PAGE 4 FOR ADDITIONAL MATERIALS/FINISHES)						
LANYARD LENGTH	1/2 INCH INCREMENTS (EX. 35 IS 3.5 INCHES)						
ACCESSORY	(SEE PAGE 8)						
EYELET OR RING SIZE	(SEE PAGE 8)						